

**DESCRIPTION**

Stainless Steel Toilet Grabrail for Ambulant Use.  
Manufactured to Comply with AS1428.1-2009

**SPECIFICATION**

Material           Stainless Steel 304 grade  
Tube Diameter    32mm  
Wall Thickness    1.2mm  
Finish             Satin Stainless  
Mounting          Stainless Steel 76mmØ concealed flange  
Multiple fixing holes


**FINISHES**

Satin finish  
Powder coated finish (to order)  
High polish mirror finish (to order)




**FASTENERS** (supplied with each grabrail)

Stainless Steel 304 Grade  
#10 X 50mm Pan Head Philips Drive Screws

Designed for the safety, security and convenience of the physically disabled.  
Easy to install on most building surfaces.

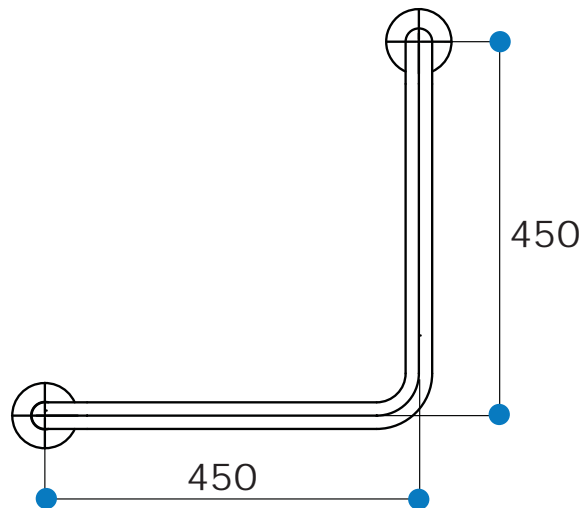

**Standard Grabrail Bend with TIG Welded Fixing Flange**

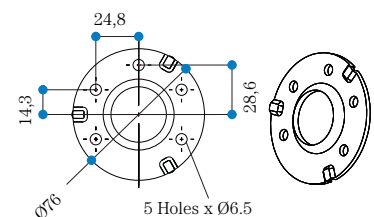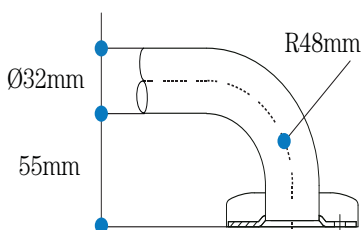

**PRODUCTS AVAILABLE**

Code	Description		
EGT2A.10SC	Reversible	450mm x 450mm	AS1428.1-2009 Ambulant*

**INSTALLATION INSTRUCTIONS****Recommended Installation Height**

To comply with Australian Standards AS 1428.1-2009, horizontal grabrails must be fastened a distance of 800-810mm from the floor (Measured to the top of the rail).

Careful planning is required to prepare the wall structures or to investigate the soundness of any existing substrates, followed by selecting the most suitable fixings for the conditions. The fastenings should be able to withstand a force of 1100N at any point from any direction.

It is recommended that suitably qualified persons, carry out installation and reference to Australian Standard requirements should be made to ensure the installation complies with all requirements.

**WARRANTY**

Axess Trading Products as described in the heading, are guaranteed to be free from defective materials and workmanship for a period of 5 years from the date of purchase, subject to the product being used for the purpose for which it was designed.

Under this warranty, products returned to Axess Trading will be repaired or replaced at no extra charge to the purchaser. Please contact us for our complete warranty certificate.

\* Compliant with AS1428.1-2009, if installed as per the provisions of the standard