

Piper Hand Shower SYSCPRETAB

Specifications

Information

Product Code

SYSCPRETAB

WELS;

3 Star - 7.5lt / min


Neoperl flow restrictor fits into the hand shower handle

Temperature rating Min1° - Max 75°

Piper Hand Shower



ABS Slider

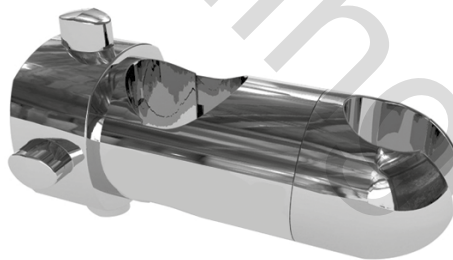

Supply Elbow



Metalflex Hose



Wall plate



WaterMark
AS/NZS 3662
WM-022411

Teflon Tape



WATER RATING
www.waterrating.gov.au

7.5 litres per minute

In accordance with AS/NZS 6400
Licence No. 0255
Axess Trading Group PTY.LTD

This hand shower system is designed to be fitted to a 32mm grab rail.

It comes with the following items.

- Piper 3 Function Hand Shower (Chrome Finish).
- Metallflex hose 2m long (1.5m Optional).
- Supply elbow with 1/2 G threads male and female.
- Neoperl flow regulator for the hand shower.
- Neoperl check valve in the supply elbow.
- 1 x ABS chrome plated slider.
- 1 roll thread sealing tape (Yellow).
- Wall cover plate.

